


## GEL CLEANER FOR WALLS

**PORCELAIN TILES, MARBLE, GRANITE, NATURAL STONE, AGGLOMERATES, GLAZED CERAMIC TILES, CONCRETE, PLASTER, TERRACOTTA, QUARRY TILES**



NOPAINT STAR is a fast-action, effective paint stripper for walls that removes graffiti from treated and untreated walls. Cleans and degreases deeply. Removes smog and dust from external walls. Removes film-forming and coating products from terracotta surfaces.

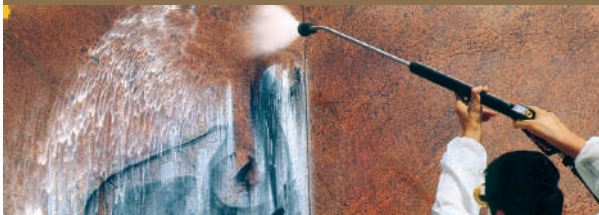

### COVERAGE

**COVERAGE (1 litre):**

**5 m<sup>2</sup>**

Coverage rates are indicative.

### Packaging

1 litre: boxes of 12.

#### WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

#### TEMPERATURES

Storage temperature: from 5° to 30° C.  
The product should be applied to materials with temperature between 5° and 30° C.

### WHAT IT'S FOR

- Removes graffiti from treated and untreated walls: it is particularly effective on rough or porous surfaces (concrete/plaster walls, bricks, natural stone...)
- Removes **WET STONE ECO** and **WET ECO**, protectors if they have been incorrectly applied or when thorough cleaning is required
- Viscous consistency: ideal for wall applications
- Provides in-depth cleaning and degreasing
- Cleans smog and dust from external walls
- Removes film-forming and coating products from terracotta surfaces

### ADVANTAGES

- Contains biodegradable ingredients
- Easy to use
- Ready to use: no dilution required
- Water-based paint remover
- Rapid and highly efficient

### HOW TO USE IT

**No dilution required:** ready to use.

#### Application:

1. Apply the product directly on the wall with a large, flat paintbrush or using the airless method.
2. Leave for at least 5 minutes.
3. Intervene with mechanical means.
4. Rinse.

For best results, use a water-jet cleaner on vertical surfaces and a single-disc cleaning machine on floors. Repeat application of the product and the consequent rinsing, if necessary (for example, on porous surfaces such as exposed brick, natural stone etc.).

**To remove possible residues of film-forming protective products such as WET STONE ECO and WET ECO** in the event of incorrect application: apply the undiluted product directly onto the surface using a brush or by spraying. Leave to react for 15 minutes, rub with a brush or single-disc machine and rinse well with water. Repeat the application in the event of obstinate treatments.

**CLEANING OF TOOLS:** clean with water after use.

#### Caution:

*If the applied product tends to dry on the surface, add a small amount of water to activate it. Check the detergent's compatibility with the type of surface before application. On coloured plaster, carry out a spot test beforehand to check whether any colour changes.*