


GEL CLEANER FOR WALLS

PORCELAIN TILES, MARBLE, GRANITE AND NATURAL STONE, AGGLOMERATES, GLAZED CERAMIC TILES, CONCRETE, PLASTER, TERRACOTTA, QUARRY TILES



NOPAINT STAR is a fast-action, effective paint stripper for walls that removes graffiti from treated and untreated walls. Cleans and degreases deeply. Removes smog and dust from external walls. Removes film-forming and coating products from terracotta surfaces.

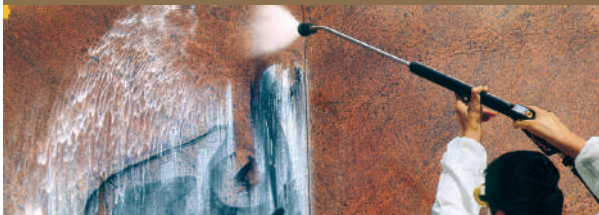

COVERAGE

With one litre:

5 m²

"Coverage is approximate"

Packaging

1 litre: boxes of 12.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
The product should be applied to materials with temperature between 5° and 30°C.

WHAT IT'S FOR

- Removes graffiti from treated and untreated walls: it is particularly effective on rough or porous surfaces (concrete/plaster walls, bricks, natural stone...).
- Removes **WET STONE ECO** and **WET ECO**, protectors if they have been incorrectly applied or when thorough cleaning is required.
- Viscous consistency: ideal for wall applications.
- Provides in-depth cleaning and degreasing.
- Cleans smog and dust from external walls.
- Removes film-forming and coating products from terracotta surfaces.

ADVANTAGES

- Contains biodegradable ingredients
- Easy to use.
- Ready to use: no dilution required.
- Water-based paint remover.
- Rapid and highly efficient.

HOW TO USE IT

No dilution required: to be used undiluted.

Application:

1. Apply the product directly on the wall with a large, flat paintbrush or using the airless method.
2. Leave for at least 5 minutes.
3. Intervene with mechanical means.
4. Rinse.

For best results, use a water-jet cleaner on vertical surfaces and a single-disc cleaning machine on floors. Repeat application of the product and the consequent rinsing, if necessary (for example, on porous surfaces such as brick walls, natural stone etc.).

To remove possible residues of film-forming products such as WET STONE ECO, WET ECO in the event of incorrect application: simply apply the undiluted product directly onto the surface with a brush or by spraying. After 15 minutes, rub with a brush or floor scrubber and rinse well with water. Repeat the application in the event of obstinate treatments.