


PRE-GROUTING PROTECTIVE AGENT

UNPOLISHED STONE AND AGGLOMERATES,
TERRACOTTA, QUARRY TILES



PRW200 facilitates grouting and subsequent cleaning operations, reducing the drying and after-laying treatment times, while protecting the material against water absorption.

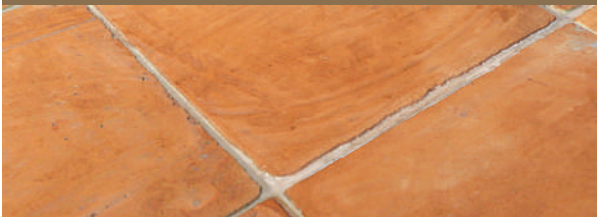

COVERAGE

COVERAGE (1 litre):

Terracotta rustic Tuscan, polished 15-20 m²

Terracotta handmade, Spanish, hollow tile, brick 7-10 m²

Stone 10-20 m²

Coverage shown is indicative and refers to single coats

Packaging

1 litre: boxes of 12.

5 litres: boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
This product must be applied to surfaces with temperature between 10°C and 30°C.

WHAT IT'S FOR

- Water-based water-repellent protector against soiling that occurs when fixing. Makes grouting and cleaning easier without altering the material's appearance
- Ideal for absorbent materials such as terracotta, quarry tiles, natural and reconstructed stone and agglomerates

ADVANTAGES

- Protects against grouting.
- It does not affect adhesion between grout and material.
- It makes cleaning after laying simple.
- It reduces drying times, making subsequent treatment faster.
- Does not affect the material's appearance.
- Nonsacrificial protective sealer.
- Easy to apply.
- After application a protective treatment can be carried out
- An **A+** classified product in accordance with the French VOC regulation

HOW TO USE IT

No dilution required: ready to use.

Application: Shake before use. Remove any dust from the surface to be treated. Apply one coat of **PRW200** using a flat paintbrush, fleece or other applicator in a uniform manner, avoiding any pooling. Also apply to the edges of the laid material with care. The surface can be grouted the day after application. Once thoroughly set, wash the surface using the most suitable cleaner for the type of material used.

Assess which type of subsequent protective treatment to complete the protection cycle.

CLEANING OF TOOLS: clean with water after use.

For ordinary maintenance: use a diluted solution of **CLEANER PRO** (1:200)

FOR PROFESSIONAL USE ONLY: to apply the product with an airless system or other spray applicators, use the appropriate PPE, as indicated in the safety data sheet.

Caution:

Since there are so many different materials, before applying the product we recommend testing it on a small area of the surface to check for any colour changes.

Do not apply the product outdoors if rain is in forecast.