




GROUT RELEASE



PRW200

ALL UNPOLISHED NATURAL STONE AND AGGLOMERATES,
QUARRY TILE, TERRACOTTA

 **WATER-BASED
TECHNOLOGY**

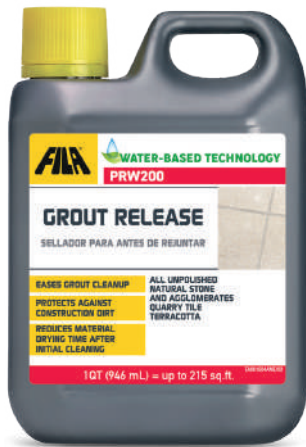

WHAT IT'S FOR

- Protects the surface against grout, construction dirt and mortar stains.
- Makes grout cleanup easy.
- Forms an invisible, protective barrier resistant to moisture and stains while allowing water vapor to escape.
- Ideal for absorbent materials: unpolished natural and reconstituted stone, quarry tile and terracotta.

ADVANTAGES

- Eco-friendly: water-based.
- Does not alter the material's natural color and finish.
- Makes post-construction cleaning simple, so that the appropriate sealer can be easily applied.
- PFOA free: non carcinogenic.
- Does not alter grout adhesion.
- Non-filming sacrificial.
- Easy to apply.
- Surface protection may be applied after product application.

HOW TO USE IT

READY TO USE, no dilution necessary. Make sure the surface to be treated is completely free of dust. Apply an even coat of **PRW200** using a paintbrush or lambswool applicator pad, avoiding surface pooling. Ensure the product also covers the edges of the installed material. The surface may be grouted 4 hours after the application of grout release **PRW200**. After the grout is cured, clean the surface with an appropriate cleaner for the material. After cleaning, apply a protective sealer. The product is not recommended for ceramic tile, polished porcelain or nonporous materials.

Caution: Before full application, test the product on a small, inconspicuous area of the surface or loose sample to check for any changes in color. Do not apply the product outdoors if rain is in the forecast.

Storage temperature: Between 41°F and 86°F (5°C and 30°C). Must be applied at temperatures between 50°F and 86°F (10°C and 30°C).

- ▶ **EASES GROUT CLEANUP**
- ▶ **PROTECTS AGAINST CONSTRUCTION DIRT**
- ▶ **REDUCES MATERIAL DRYING TIME AFTER INITIAL CLEANING**



Coverage:

1 QT (0.95 L)

Natural stone >

108-215 sq.ft. (10-20 m²)

Terracotta >

75-108 sq.ft. (7-10 m²)

Coverage rates are indicative and per coat.



Packaging:

1 QT (946 ml) 6 plastic bottles per box

Data sheets are subject to change without notice. Revision date: 2024/07/30 - REV. 03

Fila Chemicals USA, Corp.
Miami, FL 33172
tel +1-305-513-0708
filausa@filasolutions.com

TOLL FREE 1-844-FILA123



Recommended by over
200 INTERNATIONAL TOP BRANDS
manufacturers of materials for floors and wall coverings

filasolutions.com